




NORTHINGTON SMOOTH

Engineered

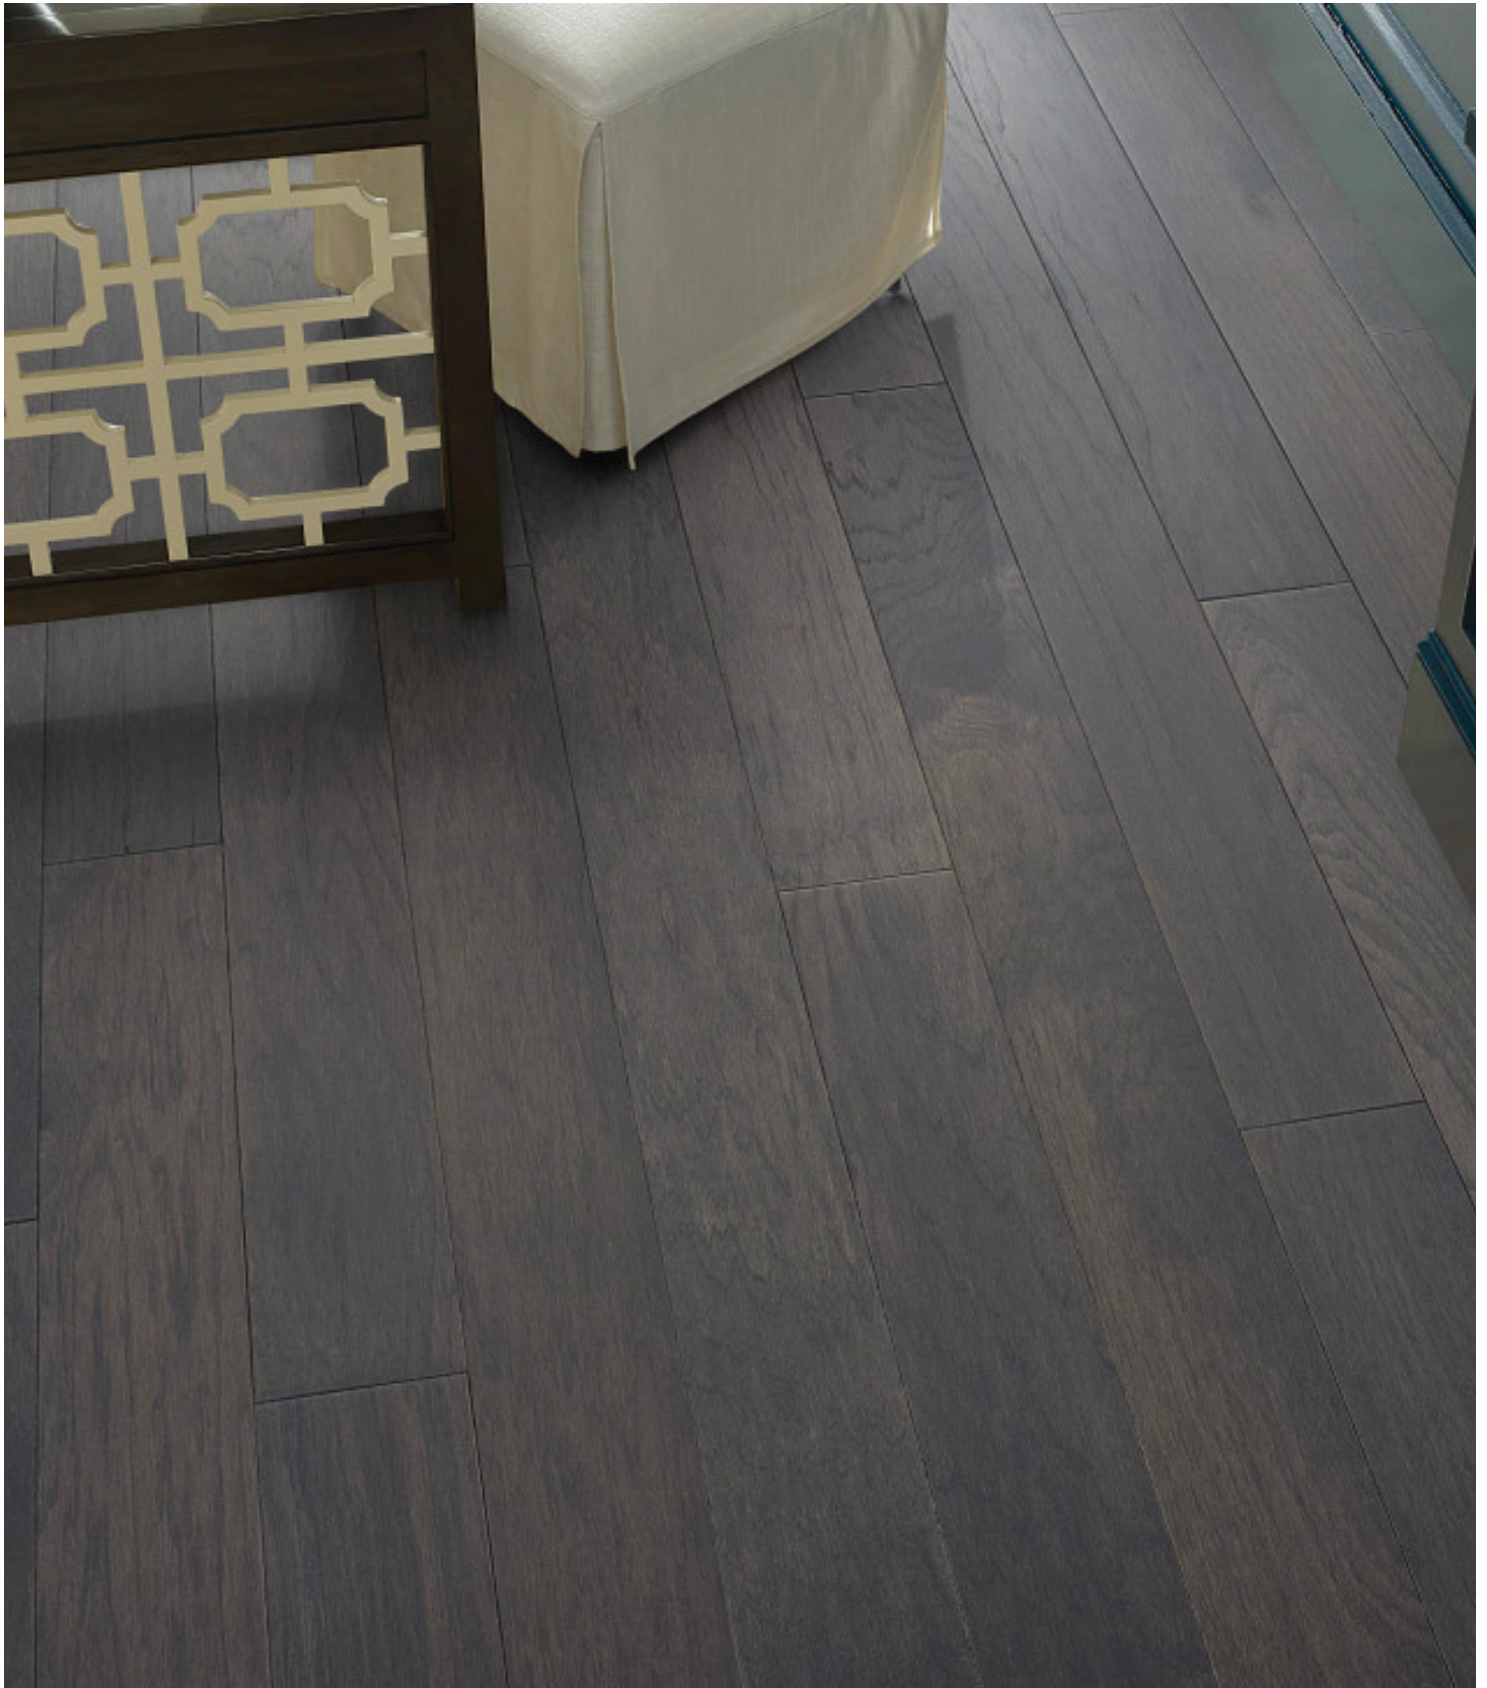

9022 Sable

NORTHINGTON SMOOTH



	US Units	Metric Units
Style Number	SW669	
Construction	Engineered	
Species	Hickory	
Nominal Overall Thickness	1/2"	11.81 mm
Nominal Width	4.94"	125.48 mm
Maximum Length	Random lengths up to 58.56"	Random lengths up to 148.74 cm
Finish	Repel - Water Resist	
Gloss Level	7%	
Surface Texture	Smooth	
Edge Description	Micro Bevel	
End Description	Mb	
Profile	Tongue And Groove	
Weight per Carton	41.3 lbs	18.73 kg
SQFT per Carton	19.72 sq ft	1.83 sq m
SQFT per Pallet	1025.44 sq ft	95.26 sq m
Installation Methods	Nail, Staple, Glue, Floating	
Installation Grade	Above, On, Below	
Variation	High	
GREENGUARD® Certified	Yes	
Cradle-to-Cradle Certified	Yes	
Radiant Heat Approved	Yes	
Residential Warranty	Repel Hardwood Lifetime	
Commercial Warranty	5 Years	
Installation	Repel Water Resistant Hardwood Flooring Installation Guidelines	
Maintenance	Hardwood Maintenance Guidelines	
All measurements are nominal.	Cartons may include random lengths.	

Features

Northington Smooth features a rich hickory character showcased in traditional and contemporary wood tones. Also available in wire brushed texture, Northington Brushed.



MADE IN THE USA

NORTHINGTON SMOOTH



Colors



1032 Canopy




2026 Burlap



5054 Greystone



7035 Chestnut



9022 Sable