




01037 Vanilla Almond Maple

*Topflight*




08002 Vista Oak

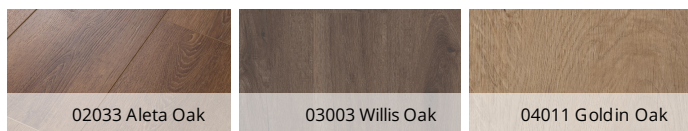

02033 Aleta Oak  
Color Variation: V2 - Slight

03003 Willis Oak  
Color Variation: V3 - Moderate


04011 Goldin Oak  
Color Variation: V4 - Substantial

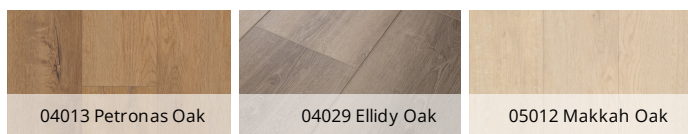

04013 Petronas Oak  
Color Variation: V3 - Moderate

04029 Ellidy Oak  
Color Variation: V2 - Slight


05012 Makkah Oak  
Color Variation: V3 - Moderate

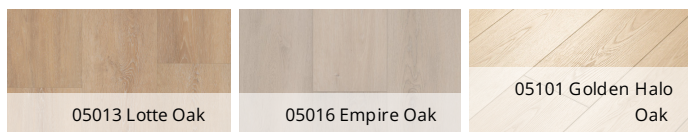

05013 Lotte Oak  
Color Variation: V3 - Moderate

05016 Empire Oak  
Color Variation: V3 - Moderate

05101 Golden Halo Oak  
Color Variation: V3 - Moderate

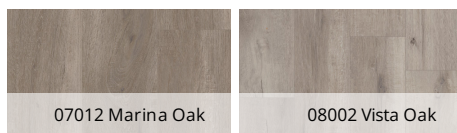

07012 Marina Oak  
Color Variation: V3 - Moderate


08002 Vista Oak  
Color Variation: V3 - Moderate

|                                 |                                                                                        |
|---------------------------------|----------------------------------------------------------------------------------------|
| STYLE NUMBER                    | 662CT                                                                                  |
| CONSTRUCTION                    | Waterproof Foamed Core                                                                 |
| EDGE PROFILE                    | Enhanced Painted Bevel                                                                 |
| NOMINAL DIMENSIONS              | 9" wide, lengths of 28", 55" and 82"                                                   |
| ACTUAL PRODUCT WIDTH            | 8.98"   23 cm                                                                          |
| ACTUAL PRODUCT LENGTH           | Multiple Lengths 27.55", 55.11" and 82.67"   Multiple Lengths 70 cm, 140 cm and 210 cm |
| WEAR LAYER THICKNESS            | 30 mil (0.03")   0.76 mm                                                               |
| OVERALL PRODUCT THICKNESS       | 0.59"   15 mm                                                                          |
| CORE THICKNESS                  | 0.472"   12 mm                                                                         |
| ATTACHED UNDERLAYMENT           | Attached Cork                                                                          |
| ATTACHED UNDERLAYMENT THICKNESS | 0.118"   3 mm                                                                          |
| FINISH                          | None                                                                                   |
| INSTALLATION METHODS            | Floating or Direct Glue                                                                |
| INSTALLATION GRADE              | All Levels of the Home                                                                 |
| PROFILE                         | Angle/Tap                                                                              |
| RESIDENTIAL WARRANTY            | USF Lifetime                                                                           |
| COMMERCIAL WARRANTY             | Resid Resil Ltd Wty Df Wr Wp Ptp                                                       |
| AREA PER BOX                    | USF 10 Year Medium Commercial                                                          |
| PIECES PER BOX                  | 20.67 sq ft   1.92 sq m                                                                |
| WEIGHT PER BOX                  | 18 pcs                                                                                 |
| BOXES PER PALLET                | 63.14 lbs   28.63 kg                                                                   |
|                                 | 36 boxes                                                                               |

## COORDINATING TRIM




Baby Threshold  
B15CB | 94"



T-Molding  
T15CB | 94"



Quarter Round  
QTRCB | 94"



Flush Stairnose  
F15CB | 94"